



9/16" EZ STAB ELITE NARROW SYSTEM

CEILING & WALLS ACOUSTICAL SUSPENSION SYSTEMS

MAIN RUNNER

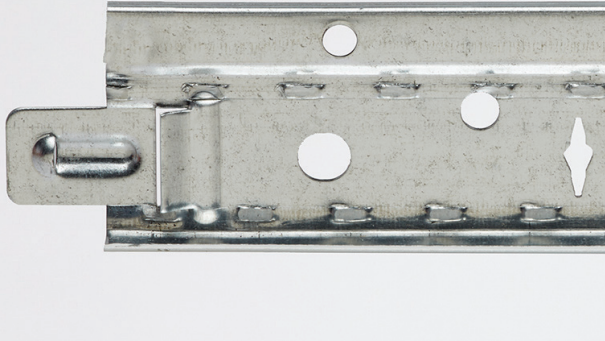

CROSS TEE

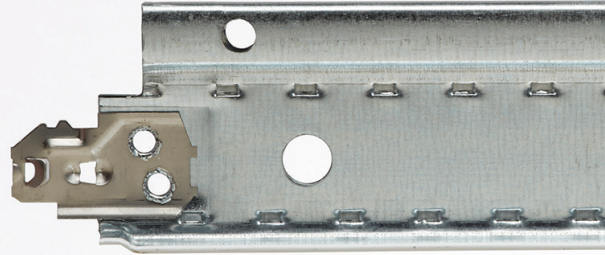

9/16" WALL ANGLE



7/8" WALL ANGLE




The slim face width complements modern design and offers flexibility and added strength.

FEATURES AND BENEFITS

- Increased frequency (3" O.C.) of patented Latitude Holes™ provides installation flexibility
- Narrow style 9/16" (15 mm) face integrates with narrow reveal edge panels
- EZ Stab clip technology allows for a fast and strong connection on cross tees with enhanced removability
- Centering tabs prevent gaps around the edge, enabling integration with trim edge panels
- Enhanced stitching increases stiffness, reducing bending or twisting
- Suitable for all seismic applications
- ICC certified (ESR-3336) and City of Los Angeles Building Code compliant via ESR-3336 LABC Supplement
- Grid features G30 hot-dipped galvanized steel web construction for corrosion resistance
- Intermediate- and heavy-duty load-bearing capabilities/classification
- Available in Standard White and Black. Additional color options are offered through our Post-Paint process. See the Visual Options - Suspension Systems page for color option details.


MAIN RUNNER

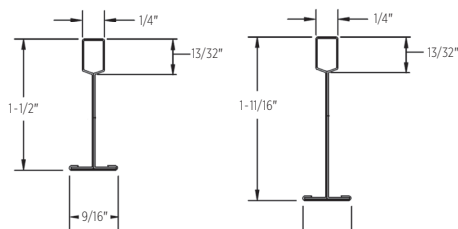


9/16 ID Grid Profile

9/16 HD Grid Profile

WALL ANGLE

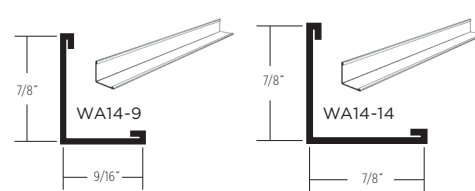

SHADOW MOLDING

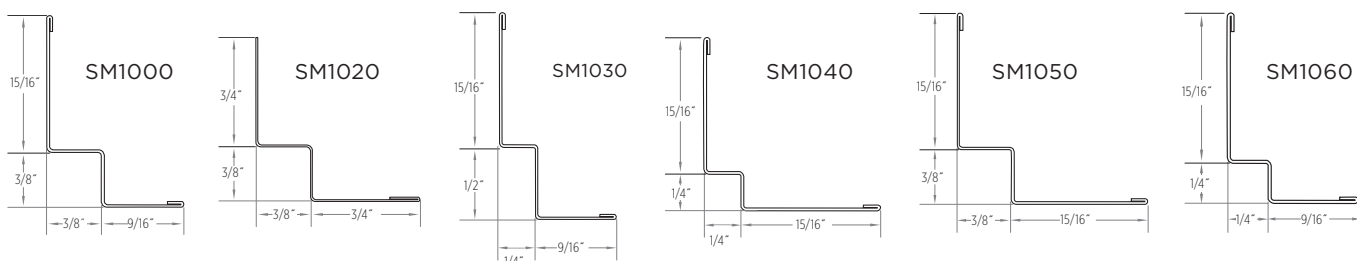

LEED® v4

RECYCLED CONTENT

up to 88%

- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ MR: Material Ingredients (HPDs)
- ✓ MR: Sourcing Raw Materials
- ✓ MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.

CERTIFICATIONS & PRODUCT DECLARATIONS



HPD AVAILABLE

ARCHITECTURAL

CertainTeed
SAINT-GOBAIN

9/16" EZ STAB ELITE NARROW SYSTEM

| | GRID FACE (IN.) | DIMENSIONS (IN.) | SLOT SPACING (IN.) | PIECES/CARTON | FT./CARTON | SEISMIC DESIGN CATEGORY | STRUCTURAL CLASSIFICATION (ASTM C635) | RECYCLED CONTENT PRE* | RECYCLED CONTENT POST* | RECYCLED CONTENT TOTAL* | ALLOWABLE UNIFORM LOAD (PLF) | ALLOWABLE CONCENTRATED LOAD AT MIDSPAN (LBF)** |
|-----------------------|-----------------|---------------------------------|--------------------|---------------|------------|-------------------------|---------------------------------------|-----------------------|------------------------|-------------------------|------------------------------|--|
| MAIN RUNNERS | | | | | | | | | | | | |
| EZES12-12-18 | 9/16 | 144 x 1-1/2 x 9/16 | 6 O.C. | 20 | 240 | A-C | ID | 25% | 35% | 60% | 13.15 | 32.88 |
| EZES12-12-19 | 9/16 | 144 x 1-11/16 x 9/16 | 6 O.C. | 20 | 240 | A-F | HD | 25% | 34% | 59% | 17.97 | 44.93 |
| CROSS TEE | | | | | | | | | | | | |
| EZES0.33-12-12 | 9/16 | 4 x 1-1/2 x 9/16 | — | 60 | 20 | — | — | 25% | 34% | 39% | — | — |
| EZES0.5-12-12 | 9/16 | 6 x 1-1/2 x 9/16 | — | 60 | 30 | — | — | 25% | 34% | 39% | — | — |
| EZES1-12-12 | 9/16 | 12 x 1-1/2 x 9/16 | — | 60 | 60 | — | — | 25% | 34% | 59% | 210.53 | 131.58 |
| EZES2-12-12 | 9/16 | 24 x 1-1/2 x 9/16 | — | 60 | 120 | — | — | 24% | 36% | 60% | 27.97 | 34.96 |
| EZES2-12-19 | 9/16 | 24 x 1-11/16 x 9/16 | — | 60 | 120 | — | HD | 25% | 34% | 59% | 50.00 | 62.50 |
| EZES2.5-12-12 | 9/16 | 30 x 1-1/2 x 9/16 | — | 60 | 150 | — | — | 24% | 36% | 60% | — | — |
| EZES4-12-12 | 9/16 | 48 x 1-1/2 x 9/16 | 12 O.C. | 60 | 240 | — | — | 24% | 36% | 60% | 8.44 | 21.09 |
| EZES4-12-19 | 9/16 | 48 x 1-11/16 x 9/16 | 12 O.C. | 60 | 240 | — | HD | 25% | 34% | 59% | 17.97 | 44.93 |
| EZES5-12-12 | 9/16 | 60 x 1-1/2 x 9/16 | 12 O.C. | 20 | 100 | — | — | 24% | 36% | 60% | 4.44 | 13.88 |
| EZES5-12-12-5s | 9/16 | 60 x 1-1/2 x 9/16 | 6,20,30,40,54 | 20 | 100 | — | — | 24% | 36% | 60% | — | — |
| EZES6-12-12 | 9/16 | 72 x 1-1/2 x 9/16 | 12 O.C. | 20 | 120 | — | — | 24% | 36% | 60% | 2.76 | 10.35 |
| EZES8-12-12 | 9/16 | 96 x 1-1/2 x 9/16 | 12 O.C. | 20 | 160 | — | — | 24% | 36% | 60% | 1.00 | 5.00 |
| WALL ANGLE | | | | | | | | | | | | |
| WA14-9 | 9/16 | 144 x 7/8 x 9/16 | — | 40 | 480 | — | — | 19% | 69% | 88% | — | — |
| WA14-14 | 7/8 | 144 x 7/8 x 7/8 | — | 40 | 480 | — | — | 19% | 69% | 88% | — | — |
| WA14-14-10 | 7/8 | 120 x 7/8 x 7/8 | — | 40 | 400 | — | — | 19% | 69% | 88% | — | — |
| WA32-32 | 2 | 120 x 2 x 2 | — | 20 | 200 | — | — | 19% | 69% | 88% | — | — |
| WA32-32-12 | 2 | 144 x 2 x 2 | — | 20 | 240 | — | — | 19% | 69% | 88% | — | — |
| WA32-15 | 2 | 120 x 2 x 15/16 | — | 20 | 200 | — | — | 19% | 69% | 88% | — | — |
| WA32-15-12 | 2 | 144 x 2 x 15/16 | — | 20 | 240 | — | — | 19% | 69% | 88% | — | — |
| SHADOW MOLDING | | | | | | | | | | | | |
| SM1000 | — | 120 x 15/16 x 3/8 x 3/8 x 9/16 | — | 40 | 400 | — | — | 19% | 69% | 88% | — | — |
| SM1020 [†] | — | 120 x 3/4 x 3/8 x 3/8 x 3/4 | — | 40 | 400 | — | — | 19% | 69% | 88% | — | — |
| SM1030 | — | 120 x 15/16 x 1/2 x 1/4 x 9/16 | — | 40 | 400 | — | — | 9% | 44% | 53% | — | — |
| SM1040 | — | 120 x 15/16 x 1/4 x 1/4 x 15/16 | — | 40 | 400 | — | — | 9% | 44% | 53% | — | — |
| SM1050 | — | 120 x 2 x 15/16 | — | 40 | 400 | — | — | 9% | 44% | 53% | — | — |
| SM1060 | — | 144 x 2 x 15/16 | — | 40 | 400 | — | — | 9% | 44% | 53% | — | — |

| | GRID FACE (mm) | DIMENSIONS (mm) | SLOT SPACING (mm) | PIECES/CARTON | M/CARTON | SEISMIC DESIGN CATEGORY | STRUCTURAL CLASSIFICATION (ASTM C635) | RECYCLED CONTENT PRE* | RECYCLED CONTENT POST* | RECYCLED CONTENT TOTAL* | ALLOWABLE UNIFORM LOAD (PLF) | ALLOWABLE CONCENTRATED LOAD AT MIDSPAN (LBF)** |
|---------------------------|----------------|-----------------|-------------------|---------------|----------|-------------------------|---------------------------------------|-----------------------|------------------------|-------------------------|------------------------------|--|
| MAIN RUNNER METRIC | | | | | | | | | | | | |
| EZES3600M-12-18 | 14 | 3600 x 38 x 14 | 150 | 20 | 72 | — | ID | 25% | 35% | 60% | 13.15 | 32.88 |
| CROSS TEE METRIC | | | | | | | | | | | | |
| EZES1200M-12-12 | 14 | 1200 x 38 x 14 | 300 | 60 | 72 | — | ID | 25% | 35% | 60% | 8.66 | 21.31 |
| EZES600M-12-12 | 14 | 600 x 38 x 14 | 0 | 60 | 36 | — | ID | 25% | 35% | 60% | 29.68 | 36.51 |

[†]SM1020 is not hemmed along 3/4" side

*Maximum recycled content percentage. Recycled content varies by manufacturing location.

**Allowable concentrated loads at midspan are determined in accordance with AC308 Section 3.2. For each framing member, the allowable concentrated load must not be combined with the allowable uniform load.

To specify Main Runners, Cross Tees, Wall Angles or Shadow Molding in black, order by item number followed by BLK. Example EZES12-12-18 BLK








MAXIMUM FIXTURE WEIGHT

| ITEM NUMBER | CONFIGURATION | | FIXTURE | | HANGER SPACING | | MAXIMUM WEIGHT | |
|---|---------------|---|-----------|-----------|----------------|-----|----------------|------------|
| | A | B | A | B | A | B | A | B |
| Main Runner to Main Runner – Drawing Key: Main Runner (I) Cross tee (---) Hanger wire (+) | | | | | | | | |
| EZES4-12-12 | | | 24" x 48" | 24" x 48" | 48" | 48" | 41.00 lbs. | 32.00 lbs. |
| EZES4-12-19 | | | 24" x 48" | 24" x 48" | 48" | 48" | 56.00 lbs. | 56.00 lbs. |
| EZES4-12-12 | | | 24" x 48" | 24" x 48" | 48" | 48" | 41.00 lbs. | 32.00 lbs. |
| EZES4-12-19 | | | 24" x 48" | 24" x 48" | 48" | 48" | 56.00 lbs. | 56.00 lbs. |
| EZES4-12-12 | | | 24" x 24" | 24" x 24" | 48" | 48" | 26.00 lbs. | 26.00 lbs. |
| EZES4-12-19 | | | 24" x 24" | 24" x 24" | 48" | 48" | 53.50 lbs. | 56.00 lbs. |

Cross tees tested as follows: EZES4-12-12 tested at 8.44 lbs/LF to 1/360 of 4' span; EZES4-12-19 tested at 17.97 lbs/LF to 1/360 of 4' span.



ACCESSORIES

| | | ITEM NUMBER | PRODUCT NAME | DIMENSIONS L" X W" X H" (MM) | COLOR | PIECES/ CARTON | LBS./ CARTON |
|----------|---|-------------|--|---|-------|-------------------|-----------------|
| SEISMIC |  | SLEEVE916 | 9/16" Sleeve | 4 x 9/16 x 1/64 (102 x 15 x 1) | White | 100 | 1 |
| |  | CTSPC-2 | Seismic Perimeter Clip | 3-1/16 x 2-1/4 x 1-1/16 (78 x 58 x 27) | Metal | 100 | 9 |
| |  | CTSTJ | Seismic Transition Joint Clip | 3-1/2 x 3-1/2 x 1-3/16 (89 x 89 x 31) | Metal | 100 | 10 |
| STANDARD |  | AHD | Adjustable Hold Down Clip | 1-1/8 x 1/2 x 1-11/16 (29 x 13 x 43) | Black | 1000 | 16 |
| |  | HW12 | Hanger Wire 12' (3660 mm) 12 Gage (2.05 mm) | 144 x 12 gage x 12 gage (3658 x 12 gage x 12 gage) | Metal | 141 | 50 |
| |  | EZSLOTTER | Slot Punch | 11 x 3-1/4 x 1 (280 x 83 x 26) | Metal | 1 | 2.5 |
| |  | SFYK | SmartFit Yoke | 8.55 x 1.25 x 9.56 (217 x 32 x 243) | Metal | 20 | 9 |

PHYSICAL DATA

MATERIAL

Hot dipped galvanized steel (G30)

FACE DIMENSION

9/16"

CROSS TEE/MAIN RUNNER INTERFACE

Stepped-end/Override

LOAD CLASSIFICATION

Heavy duty and Intermediate duty per ASTM C635

SURFACE FINISH

Painted Steel Cap

PROFILE HEIGHT

ID: 1-1/2"
HD: 1-11/16"

END DETAIL

Main Runner: Integral Stab
Cross Tee: Staked-on Stab Clip

SEISMIC CATEGORY

A, B, C, D, E, F

WARRANTY

10-year Limited Suspension Systems warranty increases to 15 years when installed with CertainTeed Ceiling Panels. Full warranty information can be found at certainteed.com/warranty.

SEISMIC PERFORMANCE

MAIN RUNNERS:

EZES12-12-18, EZES12-12-19

MINIMUM LBS. TO PULLOUT

COMPRESSION/TENSION:
180 lbs.

CROSS TEES:

EZES2-12-12, EZES4-12-12,
EZES2-12-19, EZES4-12-19

ICC EVALUATION SERVICE, INC., REPORT COMPLIANCE

Suspension systems manufactured by CertainTeed ceilings have been reviewed and are approved by listing in ICC-ES Evaluation Report ESR-3336. CertainTeed suspension systems have been reviewed and are approved by listing in the City of Los Angeles Building Code ESR-3336 LABC Supplement. Evaluation Reports are subject to reexamination, revision and possible cancellation. Refer to certainteed.com/architectural for current reports.




9/16" EZ STAB ELITE NARROW SYSTEM

VISUAL OPTIONS – SUSPENSION SYSTEMS


ACOUSTICAL AND DRYWALL SUSPENSION SYSTEMS AND TERMINUS TRIM

Our newly expanded post-paint process allows for any CertainTeed Suspension System product to be painted in a variety of new colors, matching all CertainTeed colors along with any Sherwin-Williams® colors requested by the customer. We can also match any color if a color sample is provided.


CERTAINTEED STANDARD

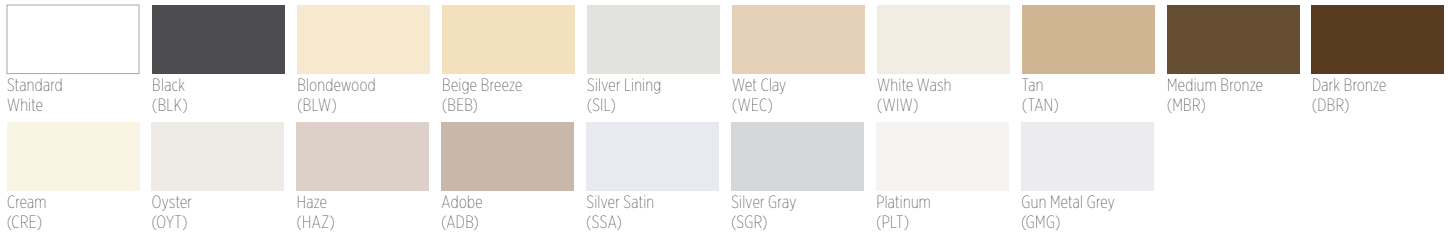

ECOPHON®

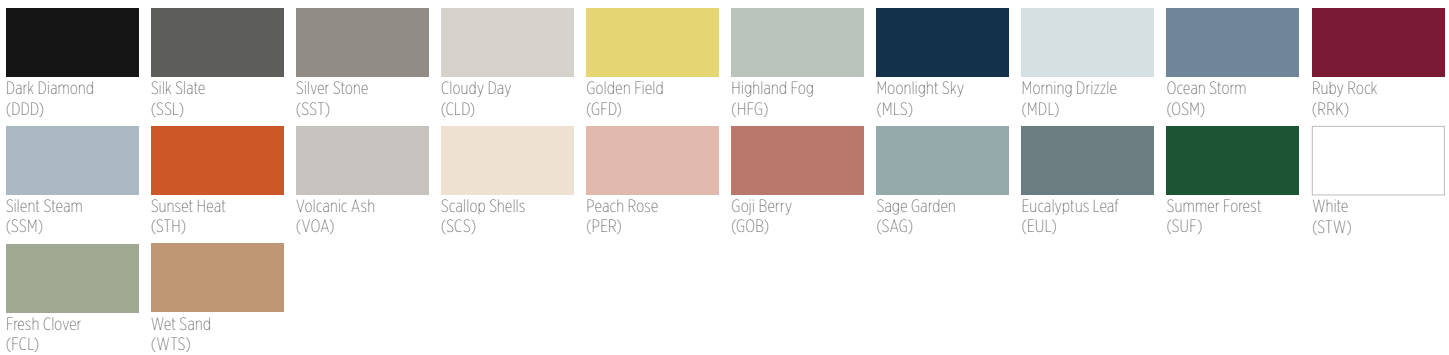

TECHSTYLE COLOR

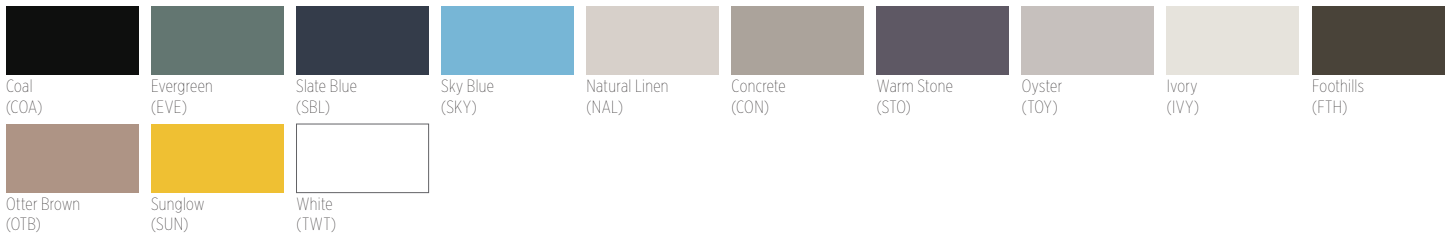


TECHSTYLE WOOD



TECHSTYLE FELT



METAL CEILINGS



For Special color options, contact your local sales representative.


The colors shown have been reproduced with all the fidelity possible with commercial printing processes. Also, a specific color may appear different on one class of product than another.

When placing an order for either Standard or Special colors, please use the following naming process preceding each catalog code:

Standard face paint: ST + 3-letter color code
 Standard 360 paint: 3T + 3-letter color code
 Special face page: SP + 3-letter color code
 Special 360 paint: 3P + 3-letter color code

Example:
EZCS4-12-12 ST WEC

Example: EZCS4-12-12 ST WEC

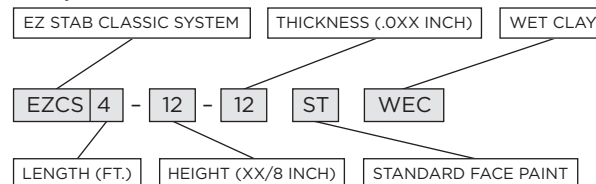

CertainTeed ARCHITECTURAL PRODUCTS

METAL • WOOD • FELT • FIBERGLASS & MINERAL FIBER • GYPSUM • SUSPENSION & INTEGRATED SYSTEMS
 2424 Lakeshore Rd. West, Mississauga, ON L5J 1K4 800-233-8990 certainteed.ca/architectural