



Experience faster installations and higher acoustic performance with Sereno Fine Fissured.

FEATURES AND BENEFITS

- Superior acoustical combination provides high in-room sound absorption with room-to-room sound blocking capabilities for enhanced privacy
- Cuts quickly and cleanly with minimal dust for cost-efficient installation
- Attractive non-directional fissured pattern to aid in quick installation
- Satisfies LEED v4 BD+C: Schools / Min. Acoustic Performance prerequisite
- Meets ANSI/ASA S12.60 classroom acoustic guidelines
- Environmental Product Declaration (EPD) available
- Health Product Declaration (HPD) available
- USDA Certified Biobased content at 98%

ALL PRODUCTS IN THIS LINE FEATURE THESE ATTRIBUTES



NRC
UP TO 0.75



SAG RESISTANT



BIOSHIELD®
MOLD/MILDEW
RESISTANT



LOW
VOC
EMISSION COMPLIANT
CERTIFIED



LR 0.83

CERTIFICATIONS & PRODUCT DECLARATIONS



EPD AVAILABLE



HPD AVAILABLE






LEED® v4

RECYCLED CONTENT	70%	
	PRE: 68%	POST: 2%

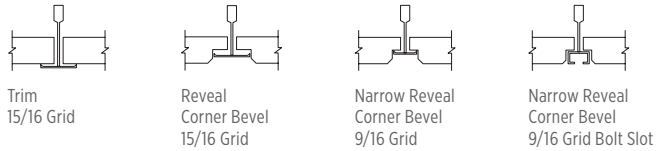
- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ EQ: Acoustic Performance
- ✓ EQ: Prereq. Min. Acoustic Performance (Schools)
- ✓ EQ: Low-Emitting Materials
- ✓ EQ: Daylight
- ✓ MR: Material Ingredients (HPDs)
- ✓ MR: Sourcing Raw Materials
- ✓ MR: Environmental Product Declarations (EPDs)
- ✓ MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.

SERENO™ FINE FISSURED

SERENO FINE FISSURED		FORMAT	DIMENSIONS (IN.)	NRC	CAC	RECYCLED CONTENT	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET	
TRIM											
	NRC 75	SFF-457 HNRC/HCACX	Panels	24 x 24 x 3/4	0.75	40	70%	12	48	52	20
		SFF-497 HNRC/HCACX	Panels	24 x 48 x 3/4	0.75	42	70%	6	48	52	20
REVEAL											
	NRC 75	SFF-454 HNRC/HCACX	Panels	24 x 24 x 3/4	0.75	40	70%	12	48	54	20
		SFF-454 HNRC/HCACX	Panels	24 x 48 x 3/4	0.75	42	70%	6	48	54	20
NARROW REVEAL											
	NRC 75	SFF-450 HNRC/HCACX	Panels	24 x 24 x 3/4	0.75	40	70%	12	48	54	20
		SFF-490 HNRC/HCACX	Panels	24 x 48 x 3/4	0.75	40	70%	6	48	54	20

EDGE DETAILS



PHYSICAL DATA

MATERIAL

Mineral Fiber

FIRE CLASS

All are Class A per ASTM E84 & CAN S102
Flame Spread: 25 or less
Smoke Developed: 50 or less

ASTM E1264 CLASSIFICATION

Type III, Form 1, Pattern C E

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017.

APPLICATION CONSIDERATIONS

Wipe with a soft cloth or vacuum with brush attachment.

MOLD/MILDEW RESISTANCE

BioShield® treatment included for added mold and mildew resistance.

WARRANTY

10-year 104/90 Limited Warranty increases to 15 years when installed with CertainTeed suspension systems. Full warranty information can be found at certainteed.com/ceilings.



CertainTeed ARCHITECTURAL

METAL • WOOD • FELT • FIBERGLASS & MINERAL FIBER • GYPSUM • SUSPENSION & INTEGRATED SYSTEMS
20 Moores Road, Malvern, PA 19355 800-366-4327 CertainTeed.com/Architectural