



Finishing Products

Eastern Region



CertainTeed® Finishing Products

CertainTeed offers a complete system of finishing products, specially developed to meet the demands of drywall professionals. The result is a professional-grade performance that minimizes callbacks improves profitability.

CertainTeed packages are color-coded to make it easy to pick the right CertainTeed product for your application.

Ready-Mixed Joint Compounds

CertainTeed joint compounds are pre-mixed, high performance products designed for professional applicators. Ideal for use in all phases of gypsum board finishing: taping, finishing, skim coating, texturing, filling corner beads and trim, and concealing nail or screw dimples. CertainTeed compounds also make an excellent bonding agent for laminating gypsum wallboards together. These products meet ASTM C475 Standard.

EXTRA LIGHTWEIGHT

CERTAINTEED EXTRA LITE ALL PURPOSE

Code: 649662 3.5 gal / 13.25 L Box Code: 649659 4.5 gal / 17 L Box Code: 649701

4.5 gal /17 L Pail - White

Code: 649931

4.5 gal /17 L Pail - Beige

- Super lightweight
- Smooth surface finish
- Faster drying
- Easy sanding

LIGHTWEIGHT

CERTAINTEED LITE ALL PURPOSE

CODE: 649697

3.5 gal / 13.25 L Box - White

Code: 649695

 $4.5~\mbox{gal} \slash 17~\mbox{L Box}$ - White

CODE: 649661

4.5 gal / 17 L Box - Yellow

CODE: 649699 4.5 gal / 17 L Pail

- Smooth surface finish
- · Minimal shrinkage
- Faster drying





CertainTeed's full range of reliable drywall finishing solutions make installations faster and simpler, all while helping you keep pace with demand.



Ready-Mixed Joint Compounds cont'd

MIDWEIGHT

CERTAINTEED MIDWEIGHT ALL PURPOSE

Code: 649663 3.5 gal / 13.25 L Box Code: 649664

4.5 gal / 17 L Box Code: 649665 4.5 gal /17 L Pail

- Smooth surface finish
- Tool compatible
- Easy sanding







FULLWEIGHT

CERTAINTEED ALL PURPOSE

Code: 649668 3.5 gal / 13.25 L Box Code: 649667 4.5 gal / 17 L Box Code: 649666

- 4.5 gal / 17 L PailSmooth surface finish
- Strong durable surface
- Tool compatible
- Easy sanding







Sandable Setting Powders

Rapid Joint® lightweight setting compounds are lightweight sandable chemically setting powders used to prefill joints, embed joint tape and conceal joints, fasteners and trim accessories on gypsum wallboard. They can also be used for interior patching and repair. They are ideal for heavy fills because they are specially formulated to harden with very little shrinkage in a prescribed time frame. Setting times are available from 20 minutes to 210 minutes.

CERTAINTEED RAPID JOINT® SETTING COMPOUNDS

18 lb / 8.17 kg Bags

RAPID JOINT® 20 Code: 412160

RAPID JOINT® 45 Code: 412161

RAPID JOINT® 90 Code: 412162

RAPID JOINT® 210 Code: 412163

- Lightweight
- Chemical hardening
- Low shrinkage
- Sandable when dry

Our range of setting compounds set up and dry quickly and are specially formulated to harden with very little shrinkage.





Joint Reinforcement Tape

CertainTeed Marco® Spark-Perf® joint reinforcement tape is a spark perforated paper tape designed for use with ready-mix joint compound to reinforce gypsum board joints and corners. Marco Spark-Perf tape is GREENGUARD® Gold certified and has a Health Product Declaration (HPD), which provides assurance of raw materials used in the final product.





CERTAINTEED MARCO® SPARK-PERF® PAPER TAPE

Code: 639341 - 500' x 10 rolls Code: 639337 - 250' x 20 rolls Code: 639338 - 75' x 20 rolls

- Spark-perforated for elimination of air bubbles
- Manufactured from fibered-paper with added tensile strength to help prevent tearing, wrinkling or stretching
- Machine roughed for superior bonding





NO-COAT® Drywall Corners

The NO-COAT® Structural Laminate (SLAM®) design represents a revolutionary drywall corner system that provides superior strength and durability, installs faster, and delivers bottom line savings in labor.


NO-COAT structural laminate corners abandon corner bead design entirely. Instead, the SLAM design integrates new technologies and materials like dimensionally extruded copolymer plastic and formulated saturated paper. The result is a corner system that outperforms all others in the market. All NO-COAT drywall corners are GREENGUARD Gold certified and have a Health Product Declaration (HPD), which provides assurance of raw materials used in the final product.







SLAM TECHNOLOGY INTEGRATES THREE KEY COMPONENTS PROVIDING THE DURABILITY, FLEXIBILITY, AND STRENGTH THAT WON'T CRACK UNDER PRESSURE.

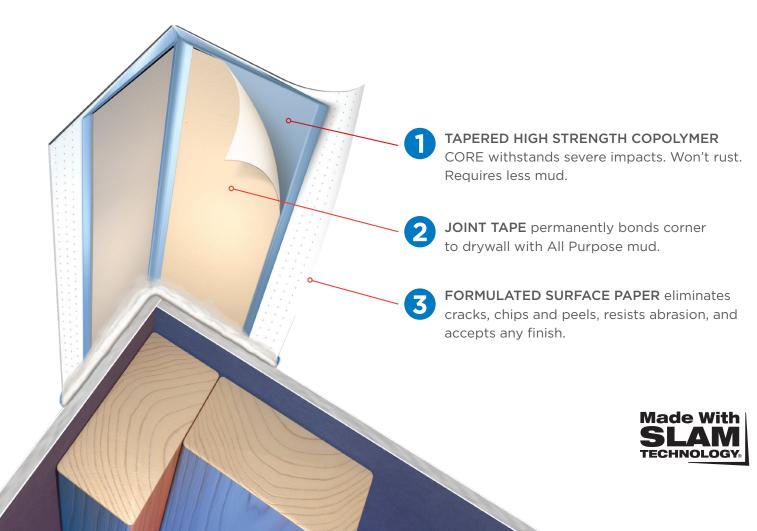

NO-COAT® Flexible Drywall Corners

NO-COAT® flex roll products are ideal for off-angle applications, both short and long runs. Wide flange covers large gaps and poor framing. Built-in flexible hinge fits any inside or outside corner angle and creates crisp, straight lines. Creating perfect looking corners that will stand the test of time is simple with these two options from CertainTeed. Each one is easy to apply and produces a strong, uniform surface every time. They won't blister, bubble, dent or crack and the surface paper is ideal for applying paint or texture.

CERTAINTEED NO-COAT® FLEXIBLE CORNER 325

Code: 639586

100' x 3-1/8" - 10 rolls per case or individual rolls

NO-COAT Flexible Corner 325 offers the same durability and strength as Flexible Corner 450, with a narrower flange width that makes it ideal for shorter off-angle spans.

- Finishes short run off-angles of any length with straight, precise lines
- Built-in flexible hinge forms to any inside or outside corner angle
- Flange width hides irregular framing
- SLAM corner design ensures strength, durability, labor savings and eliminates costly callbacks



CERTAINTEED NO-COAT® FLEXIBLE CORNER 450

Code: 639585

100' x 4-1/5" - 4 rolls per case or individual rolls

The world's #1 flex product has earned the reputation for delivering perfectly straight lines for challenging off-angles and long spans, while withstanding settling, shrinking lumber, seismic movements and temperature variations.

- Extra stiff profile provides easy application for long spans
- Wide flange covers large gaps and poor framing
- Built-in flexible hinge adjusts to fit any inside or outside corner angle
- SLAM corner design ensures strength, durability, labor savings and eliminates costly callbacks





NO-COAT® Drywall Corner Sticks

Optimal strength and performance for the toughest, straightest edge! NO-COAT® easy-to-install stick lengths deliver perfect corners in record time. Mud applied, extra tough drywall corners that withstand severe impacts and settling. Won't blister, bubble or edge crack. Apply with CertainTeed tools for high speed installations and flawless results. Available in Outside and Inside 90°, 3/8" and 3/4" Bullnose, 1/2" and 5/8" L-Trim and Arch profiles.

CERTAINTEED NO-COAT® OUTSIDE 90

Code: 640665 - 8' Code: 640666 - 9' Code: 640667 - 10' Code: 640668 - 12'

CERTAINTEED NO-COAT® INSIDE 90

Code: 640661 - 8' Code: 640662 - 9' Code: 640663 - 10'

CERTAINTEED NO-COAT® BULLNOSE

Bullnose 3/8"

Code: 639613 - 8' Code: 639614 - 9' Code: 639615 - 10' Code: 640669 - 12'

Bullnose 3/4"

Code: 640657 - 8' Code: 640658 - 9' Code: 640659 - 10' Code: 640660 - 12'

CERTAINTEED NO-COAT® L-TRIM

L-Trim 1/2"

Code: 640670 - 10'

L-Trim 5/8"

Code: 640671 - 10'

CERTAINTEED NO-COAT® ARCH

Arch Bullnose 3/4" Code: 639612 - 10' Arch Outside 90° Code: 640655 - 10'













NO-COAT® PRO Automated Drywall Corner System

The NO-COAT® PRO automated drywall corner system — consisting of NO-COAT PRO and NO-COAT PRO CORNER — produces ready-to-install drywall corners with joint compound applied to any angle and cut to any length. The fastest and most efficient cornering system available.

CERTAINTEED NO-COAT® PRO CORNER

Code: 640653 250' x 3-3/4" - 1 roll

NO-COAT PRO CORNER flexible roll product is ideal for production work,long columns and soffits. When used with the NO-COAT PRO machine,production time is dramatically reduced, and waste is virtually eliminated.

- Extra stiff profile provides easy application for long spans
- Wide flange covers large gaps and poor framing
- · Built-in flexible hinge adjusts to fit any inside or outside corner angle
- SLAM corner design ensures strength, durability, labor savings and eliminates costly callbacks

CERTAINTEED NO-COAT® PRO

Code: 405331

The NO-COAT PRO machine is the first and only automated system for custom cutting corners of any length or angle. Its lightweight portability makes it easy to move on the jobsite. Used in conjunction with NO-COAT PRO CORNER, it is simply the fastest and most efficient cornering system available.

- Outside 90° corners and long spans of any angle
- · Portable size is light-weight and easy to maneuver
- Replaces pre-cut stick lengths and roll products with one simple 250' (76.2 m) roll
- Easy-to-use keypad stores custom measurements
- 5 gallon (19 L) hopper is easy-to-fill, clean and cap for overnight mud storage





LEVELLINE® Drywall Corner





LEVELLINE® flexible rolls are ideal for off-angle applications, both short and long runs. Wide flange covers large gaps and poor framing. The built-in flexible hinge fits any inside or outside corner angle and creates crisp, straight lines.

A brand new addition to our Levelline family, LEVELLINE Outside 90 corners are easy to handle and install, better than metal — no memory, less waste, less dents, no rust — creating crisp, straight corners.

All LEVELLINE drywall corners are GREENGUARD Gold certified and have a Health Product Declaration (HPD), which provides assurance of raw materials used in the final product.

CERTAINTEED LEVELLINE® FLEXIBLE ROLLS

Code: 640656

100' x 2-3/4" - 12 roll case or individual rolls

- Finishes short runs and off-angles—of less than 3 m (10')—with straight, precise lines
- Built-in flexible hinge forms to any inside or outside corner angle
- Flange width hides irregular framing


CERTAINTEED LEVELLINE® OUTSIDE 90

Code: 650188 - 8' Code: 650187 - 9' Code: 650189 - 10'

- Provides superior impact resistance, easier to repair damage
- Joint tape on the interior creates a 100% bond to drywall
- · Less compound Less dry time*
- Lighter and easier to cut than metal bead, no sharp edges or burring
- Reduces storage and handling damage
- * Based on contractor testimonials and internal testing





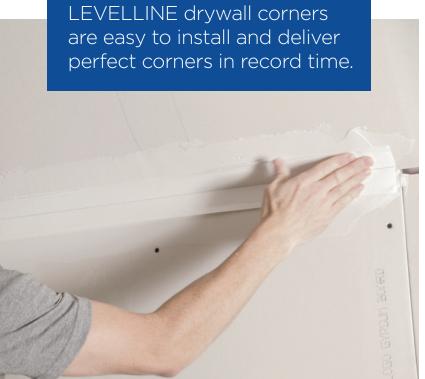



AquaBead Water-Activated Drywall Corner





Water-activated AquaBead® offers fast, easy installation and outstanding performance, every time.

CertainTeed AquaBead corner products are quick and easy — just spray with water and press. No messy compound or spray adhesive required. They can be coated within 30 minutes for quicker finishing. Robust paper-polymer-paper design withstands impacts and movement to prevent dents and edge cracking. All AquaBead drywall corners are GREENGUARD Gold certified and have a Health Product Declaration (HPD), which provides assurance of raw materials used in the final product.

Certain

CERTAINTEED AQUABEAD® OUTSIDE 90

Code: 639662 - 8' Code: 639661 - 9' Code: 639663 - 10'

CERTAINTEED AQUABEAD® OUTSIDE 90 TRIM

Code: 640742 - 8' Code: 640743 - 9' Code: 640744 - 10' Code: 640745 - 12'

CERTAINTEED AQUABEAD® BULLNOSE

Code: 639666 - 8' Code: 639665 - 9' Code: 639660 - 10'

CERTAINTEED AQUABEAD® L-TRIM

L-Trim 1/2" Code: 639664 - 10' L-Trim 5/8"

Code: 639872 - 10'





- Simple to apply
- Superior bonding
- No nails, compound or spray glue required
- Easy to cut
- Won't rust or crack
- Lightweight for easy handling
- Impact resistant

Specially engineered nose does not require coating. Just fill the outside edges with joint compound to create the perfect corner.

Water-activated adhesive provides a superior bond directly to drywall

Perforations allow compound to adhere to the drywall surface



Drywall Corner Tools

CERTAINTEED NO-COAT® ROLLERS

CertainTeed rollers press corners firmly and accurately into place, creating an absolute bond to the drywall. Drywall corner installations are faster and easier, delivering bottom-line savings on labor and mud.

- Ensures high speed, accurate installations
- Squeezes out excess mud
- Taper matches exact corner profile for the maximum bond with the minimum amount of mud
- Highly durable. Stainless steel components provide extreme corrosion resistance
- Stainless steel rollers with Nylatron and brass bushings
- · Stainless steel frame and hardware

CERTAINTEED NO-COAT® PRO ROLLER

- Larger wheels for a better 90 degree corner
- Durable thermoplastic roller wheels
- · Stainless steel frame and hardware
- Corrosion resistant

CERTAINTEED AQUABEAD® ROLLERS

CertainTeed AquaBead Rollers allow for high speed installations and flawless results

- Ensures high speed, accurate installations
- Squeezes out excess mud
- Taper matches exact corner profile for the maximum bond with the minimum amount of mud
- Pliable roller wheels. Highly durable.

CERTAINTEED DOUBLE BARREL HOPPER®

Works with inside, outside and bullnose stick corners and flexible corners.

Code: 640676

- Eliminates part changes or reconfigurations
- Ensures a uniform, high-speed installation
- Single piece gates with ergonomic hand knob allow for fast and easy adjustments
- High density polyurethane tank and gate controllers
- Stainless steel reservoir trough and gates











TECHNICAL INFORMATION

SITE CONDITIONS

The room temperature should be maintained at 50°F (10°C) for 48 hours prior to application and continuously thereafter until completely dry. Gypsum wallboard should be dry for at least 48 hours before the application of joint compounds. Continuous ventilation must be provided to ensure proper drying. When using temporary heating, care should be taken to avoid overheating and high humidity.

TECHNICAL REFERENCES

For additional information on the application and finishing of CertainTeed Joint Compounds please consult Safety Data Sheet or consult manufacturer.

WARRANTY

www.certainteed.com/warranty

Get a smooth finish quickly and easily with our range of dependable finishing products. Visit certainteed.com/drywall or call 800-233-8990









The Health Product Declaration logo is a trademark or servic mark of Health Product Declaration Collaborative, Inc., i the United States and in othe countries and is being use herein under licens:





