
ECOPHON[®] AKUSTO[™] WALL C SUPER G

FIBERGLASS WALL PANELS

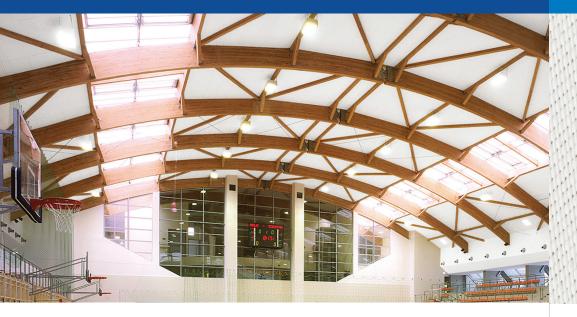

Akusto Wall C Super G fiberglass wall panel features an impact resistant surface.

FEATURES AND BENEFITS

- High impact resistance
- Use as a complement and/or alternative to acoustical ceiling panels for excellent acoustical performance within a space
- Moisture resistant
- Available in 2 standard colors

ATTRIBUTES



Ĩ,

LR 0.37 / 0.78

WASHABLE

BIOSHIELD® MOLD/MILDEW RESISTANT

LEED[®] v4



CERTIFICATIONS & PRODUCT DECLARATIONS



EPD AVAILABLE

ARCHITECTURAL





COLORS



AKUSTO [™] WALL C SUPER G			COLOR	DIMENSIONS MM(IN.)	NRC	LR	RECYCLED CONTENT	PIECES/ CARTON	SQ. M (FT.)/ CARTON	LBS./ CARTON
WALL PANEL										
	NRC .95	3557 7729	White	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.78	53%	4	21.3 (≈ 70)	71
		3557 7028	Gray	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.38	53%	4	21.3 (≈ 70)	71

EDGE DETAILS



PHYSICAL DATA

MATERIAL Fiberglass

FIRE CLASS (ASTM E1264) Tested according to ASTM E84 & CAN S102 Flame Spread: 25 or less Smoke Developed: 50 or less

MOLD/MILDEW RESISTANCE

Fiberglass substrate is inherently resistant to the growth of mold and mildew.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment. Washable with mild detergent.

WARRANTY

10-year Ecophon Warranty. Full warranty information can be found at certainteed.com/warranty.





CertainTeed ARCHITECTURAL

 METAL • WOOD • FELT • FIBERGLASS & MINERAL FIBER • GYPSUM • SUSPENSION & INTEGRATED SYSTEMS

 20 Moores Road, Malvern, PA 19355
 800-366-4327
 certainteed.com/architectural