



Unique gypsum panels with easy plenum access.

FEATURES AND BENEFITS

- Perforated, sound absorbent gypsum panel available in 4 unique patterns
- Fully finished white surface is capable of being post-painted to suit design
- Durable lay-in panel provides easy plenum access
- Proprietary Saint-Gobain formaldehyde scavenging performance (inherent to all Gyptone products)

ATTRIBUTES



RECYCLED CONTENT



LR 0.70-0.71



EMISSION COMPLIANT CERTIFIED

LEED® v4

RECYCLED CONTENT	up to 85%
-------------------------	------------------

- ✓ EQ: Interior Lighting
- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ EQ: Acoustic Performance
- ✓ EQ: Prereq. Min. Acoustic Performance (Schools)
- ✓ EQ: Low-Emitting Materials
- ✓ MR: Material Ingredients (HPDs)
- ✓ MR: Sourcing Raw Materials
- ✓ MR: Environmental Product Declarations (EPDs)

LEED® is a registered trademark of the U.S. Green Building Council.

CERTIFICATIONS & PRODUCT DECLARATIONS

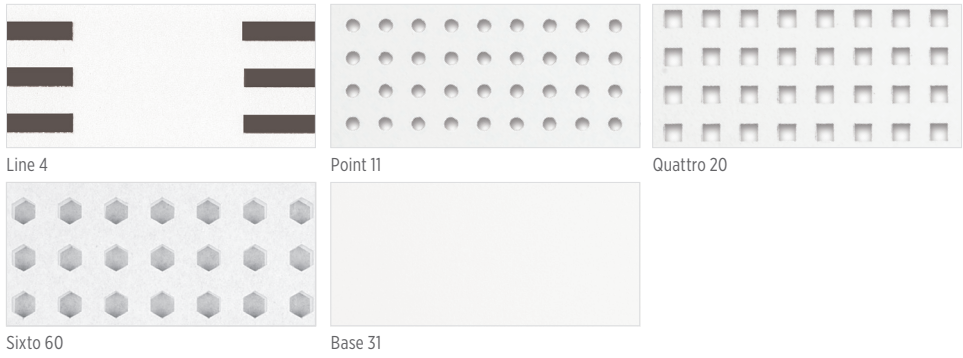


EPD AVAILABLE





HPD AVAILABLE

GYPTONE® ACOUSTICAL PANELS





LINE 4™

	FORMAT	DIMENSIONS (IN.)	NRC*	CAC*	LR	HOLE SIZE (MM)	PERFORATED AREA	RECYCLED CONTENT	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET		
TRIM														
	NRC 70	5200410258	Panels	24 x 24 x 1/2	0.70	35	0.70	6 x 95	17%	85%	6	24	39	32
NARROW REVEAL														
	NRC 70	5200410261	Panels	24 x 24 x 1/2	0.70	35	0.70	6 x 95	17%	85%	6	24	39	32



*NRC and CAC values when used with CertainTeed Sustainable™ Insulation in unfaced 3-1/2" (R-11) as an overlay above the installed panel (Without insulation NRC=0.60, CAC=17)

POINT 11™

	FORMAT	DIMENSIONS (IN.)	NRC*	CAC*	LR	HOLE SIZE (MM)	PERFORATED AREA	RECYCLED CONTENT	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET		
TRIM														
	NRC 80	5200410316	Panels	24 x 24 x 1/2	0.80	35	0.71	6.5	12%	85%	6	24	39	32
NARROW REVEAL														
	NRC 80	5200410320	Panels	24 x 24 x 1/2	0.80	35	0.71	6.5	12%	85%	6	24	39	32

*NRC and CAC values when used with CertainTeed Sustainable Insulation in unfaced 2-1/2" (R-8) as an overlay above the installed panel (Without insulation overlay: NRC=0.60, CAC=17)



QUATTRO 20™

	FORMAT	DIMENSIONS (IN.)	NRC*	CAC*	LR	HOLE SIZE (MM)	PERFORATED AREA	RECYCLED CONTENT	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET		
TRIM														
	NRC 75	5200410417	Panels	24 x 24 x 1/2	0.75	35	0.71	9	18%	85%	6	24	39	32
NARROW REVEAL														
	NRC 75	5200410422	Panels	24 x 24 x 1/2	0.75	35	0.71	9	18%	85%	6	24	39	32

*NRC and CAC values when used with CertainTeed Sustainable Insulation in unfaced 2-1/2" (R-8) as an overlay above the installed panel (Without insulation overlay: NRC=0.65, CAC=17)



GYPTONE® ACOUSTICAL PANELS

SIXTO 60™

	FORMAT	DIMENSIONS (IN.)	NRC*	CAC*	LR	HOLE SIZE (MM)	PERFORATED AREA	RECYCLED CONTENT	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET		
TRIM														
	NRC 80	5200609848	Panels	24 x 24 x 1/2	0.80	35	0.71	11	17%	85%	6	24	39	16
NARROW REVEAL														
	NRC 80	5200609840	Panels	24 x 24 x 1/2	0.80	35	0.71	11	17%	85%	6	24	39	16


*NRC and CAC values when used with CertainTeed Sustainable Insulation in unfaced 2-1/2" (R-8) as an overlay above the installed panel (Without insulation NRC=0.70, CAC=17)

BASE 31™


	FORMAT	DIMENSIONS (IN.)	NRC*	CAC*	LR	HOLE SIZE (MM)	PERFORATED AREA	RECYCLED CONTENT	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET		
TRIM														
		5200410489	Panels	24 x 24 x 1/2	—	35	0.82	—	—	85%	6	24	44	32
NARROW REVEAL														
		5200410494	Panels	24 x 24 x 1/2	—	35	0.82	—	—	85%	6	24	44	32

*CAC values when used with CertainTeed Sustainable Insulation in unfaced 3-1/2" (R-11) as an overlay above the installed panel


SUSPENSION SYSTEM OPTIONS



Trim
15/16 Grid



Narrow Reveal
Corner Bevel
9/16 Grid



Narrow Reveal
Tier Drop
9/16 Grid

PHYSICAL DATA

MATERIAL

Gypsum

ASTM E1264 CLASSIFICATION

Type XX, Pattern A G

FIRE CLASS (ASTM E1264)

All are Class A per ASTM E84 & CAN S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment. Painted surfaces can be cleaned with a damp cloth and mild detergent.



CertainTeed ARCHITECTURAL

METAL • WOOD • FELT • FIBERGLASS & MINERAL FIBER • GYPSUM • SUSPENSION & INTEGRATED SYSTEMS
20 Moores Road, Malvern, PA 19355 800-233-8990 certainteed.com/architectural