


MINERAL FIBER TEXTURED

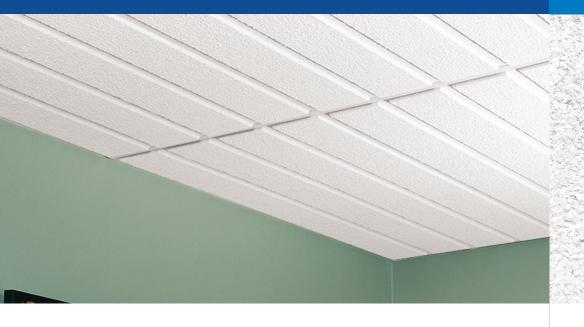

Two lightly textured mineral fiber panels; one with face scoring for visual impact, and one with highly decorative edge detail options.

FEATURES AND BENEFITS

- Fine texture with highly decorative edge detail options
- Upscale appearance
- 3 Customline options with clean, face scoring
- Environmental Product Declaration (EPD) available for this product
- Health Product Declaration (HPD) available for this product
- USDA Certified Biobased content at 98%

ATTRIBUTES







BIOSHIELD® MOLD/MILDEW



LR 0.82/0.83



EMISSION COMPLIANT



SAG RESISTANT

LEED® v4

RECYCLED CONTENT	70%			
	PRE: 68%	POST: 2%		

- MR: PBT Source Reduction (Healthcare)
- EQ: Low-Emitting Materials
- EQ: Daylight
- MR: Material Ingredients (HPDs)
- MR: Sourcing Raw Materials
- MR: Environmental Product Declarations (EPDs)
- MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.

CERTIFICATIONS & PRODUCT DECLARATIONS







EPD AVAILABLE HPD AVAILABLE

CASHMERE® STYLE EDGE | CASHMERE CUSTOMLINE

CASHMERE STYLE EDGE		FORMAT	DIMENSIONS (IN.)	NRC	CAC	RECYCLED CONTENT	PIECES/ CARTON	SQ. FT./ CARTON	LBS./ CARTON	CARTONS/ PALLET	
TIER REVEAL (9/16" GRID ONLY)											
NRC .60	G CMTS-124	Panels	24 x 24 x 3/4	0.60	35	70%	14	56	61	16	
	CMTS-412	Panels	24 x 24 x 3/4	0.60	35	70%	14	56	61	16	
		_	_	_	_	_	_	_	_	_	
TIER REVEAL (15/16" GRID ONLY)											
NRC.60	CMTS-124-1516	Panels	24 x 24 x 3/4	0.60	35	70%	14	56	61	16	
	CMTS-412-1516	Panels	24 x 24 x 3/4	0.60	35	70%	14	56	61	16	
		_	_	_	_	_	_	_	_	_	
FLUTED REVEAL (9/16" (
NRC. 60	CMF-124	Panels	24 x 24 x 3/4	0.60	31	70%	14	56	52	16	
	Ž										
OGEE REVEAL (9/16" GRID ONLY)											
ZBC.60	CM0-124	Panels	24 x 24 x 3/4	0.60	31	70%	14	56	52	16	
	NRC										
CASHMERE CUSTO	MLINE	FORMAT	DIMENSIONS (IN.)	NRC	CAC	RECYCLED CONTENT	PIECES/ CARTON	SQ. FT./ CARTON	LBS./ CARTON	CARTONS/ PALLET	
REVEAL											
NRC .60	CDS-224	Panels	24 x 48 x 3/4	0.60	35	70%	8	64	64	16	
	CDS-448	Panels	24 x 48 x 3/4	0.60	35	70%	8	64	64	16	
	CDS-812	Panels	24 x 48 x 3/4	0.60	35	70%	8	64	64	16	
NARROW REVEAL											
<u>_</u>	CDSN-224	Panels	24 x 48 x 3/4	0.60	35	70%	8	64	64	16	

24 x 48 x 3/4

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990.

CDSN-812

CASHMERE® STYLE EDGE | CASHMERE CUSTOMLINE

STYLE EDGE









Tier Reveal Edge (Style Edge)


Fluted Edge (Style Edge)


Ogee Edge (Style Edge)

EDGE DETAILS









STYLE EDGE SCORING OPTIONS



24 x 24 (CMTS 412, CMTS 412-1516)

CUSTOMLINE SCORING OPTIONS







PHYSICAL DATA

MATERIAL

Mineral Fiber

FIRE CLASS

All are Class A per ASTM E84 & CAN S102 Flame Spread: 25 or less Smoke Developed: 50 or less

ASTM E1264 CLASSIFICATION

Type III, Form 2, Pattern E (Style Edge)
Type III, Form 2, Pattern E K (Customline)

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017.

INSTALLATION CONSIDERATION

Product is lot sensitive. Differing manufacturing dates should not be mixed in a single ceiling or unbroken area.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment.

MOLD/MILDEW RESISTANCE

BioShield* treatment included for added mold and mildew resistance.

WARRANTY

10-year 104/90 Limited Warranty increases to 15 years when installed with CertainTeed suspension systems. Full warranty information can be found at certainteed.com/warranty.

WARRANTY (CUSTOMLINE)

1-year Limited Warranty



